

ORION™ NJE-4000

NON-LINEAR JUNCTION EVALUATOR



ORION™ NJE-4000
NON-LINEAR JUNCTION EVALUATOR


U.S. PATENTS: 6,816,122; 6,057,765; 6,163,269
U.K. PATENTS: GB234 432; GB235 1164; GB238 1077; GB238 1078



ORION™ NJE-4000 NON-LINEAR JUNCTION EVALUATOR

Orion Advancements

The ORION is a state-of-the-art Non-Linear Junction Detector which detects hidden electronic devices. A Non-Linear Junction Detector transmits an RF signal and then "listens" for harmonic returns to detect the presence of electronics, regardless of whether the electronic device is radiating, hardwired, or even turned on.

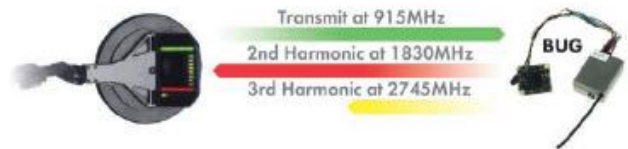

Technical Advancements

- 1 **PATENTED FREQUENCY HOPPING FUNCTIONALITY** increases detection reliability by rapidly hopping over a wide frequency band.
- 2 **ADVANCED DIGITAL SIGNAL PROCESSING ALGORITHMS** provides up to 18dB increase in detection sensitivity.
- 3 **MANUAL OR AUTOMATIC POWER CONTROL** ranges from 14 milliwatts to 1.4 watts.
- 4 **SYNTHESIZED TRANSCEIVER** provides frequency stability and agility to automatically search for clean operating frequencies (880–1,005MHz; 902.2–927.8MHz for USA).
- 5 **CIRCULARLY POLARIZED TRANSMIT AND RECEIVE ANTENNA** removes risk of missing a threat due to incorrect antenna polarization.
- 6 **AUDIO DEMODULATION** includes AM and FM as well as tone identification modes.



The patented technical advancements in the ORION are not paralleled in any other product in the world.

Ergonomic Advancements

- 1 **BALANCED, LIGHTWEIGHT DESIGN** with integrated transceiver, extension pole, antenna, and display.
- 2 **OPERATIONAL WEIGHT** is 3.3 lbs (1.5 kg). Carrying case is slightly larger than a briefcase.
- 3 **ALL TRANSMIT AND RECEIVE SIGNALS** are multi-plexed onto a single concealed cable eliminating assembly and tangled cords. Wireless infrared headphones eliminate audio cables.
- 4 **CAMCORDER-STYLE BATTERIES** are included with an external charger. (Four batteries; 2.5 hours run time per battery).



Until the ORION, Non-Linear Junction Detectors were bulky, difficult to use, and difficult to transport.

OPERATIONAL MODES

Search 2 & 3 Mode

Provides evaluation of both 2nd and 3rd Harmonic returns. Strong 2nd Harmonic (red) indicates electronic components while Strong 3rd Harmonic (yellow) indicates corrosive (false) junctions.

- Search CW - continuous wave operation
- Search 2 & 3 - pulsing operation
- Search HOP - Frequency hopping operation (provides increased detection reliability)



ID Mode

Provides detection of non-linear junctions using an audible tone. This mode is optimized for long-range detection of non-linear junctions.

- Produces 1kHz FM modulated tone
- Provides listening of 2nd & 3rd Harmonics



Using the ORION's audible tone to detect a junction takes advantage of the discrimination capability of the human ear.

Listen Mode

Provides detection and discrimination of non-linear junctions using demodulation for both 2nd and 3rd Harmonics.

- Demodulation:
- AM
 - FM
 - 20kHz Pulsing Mode



This mode provides excellent discrimination functions by relying on audio characteristic sounds associated with non-linear junctions or active devices.

Additional Control Functions

Control functions are easily adjusted using the ORION keypad.

- Volume
- Transmit Power
- Frequency Selection
- Signal Processing Gain
- Trip Point Warning Settings



Wireless Headphones

- 1 Wireless IR headphones eliminate cables that can interfere with search activities.
- 2 Headphones can be plugged into the main unit or the IR receiver.
- 3 Volume control is adjusted via the main unit.





ORION™ NJE-4000 NON-LINEAR JUNCTION EVALUATOR



TECHNICAL SPECS

ORION ADVANTAGES

- FREQUENCY-HOPPING FUNCTIONALITY**
INCREASES DETECTION RELIABILITY
- REMOTE CONTROL PORT**
ALLOWS USER TO OPERATE UNIT AT A DISTANCE WITH COMPUTER SOFTWARE
- LIGHT WEIGHT**
BALANCED ERGONOMIC DESIGN FOR EASE OF USE
- HIGH TRANSMIT POWER**
FOR RAPIDLY SEARCHING A LARGE AREA WITH GREATER PENETRATION
- MINIMUM SET-UP TIME**
NO CABLES OR BULKY TRANSCIVER UNITS TO CARRY
- PROGRAMMABLE DIGITAL SIGNAL PROCESSING**
PROVIDES INCREASED SENSITIVITY
- CIRCULARLY POLARIZED ANTENNA**
REDUCES SEARCH TIME AND IMPROVES RELIABILITY
- DUAL HARMONIC WITH DISCRIMINATION ALGORITHMS**
MINIMIZES FALSE ALARMS
- CAMCORDER-STYLE BATTERY**
WITH LONG RUN TIME AND DUAL QUICK CHARGER
- WIRELESS HEADPHONES AND GRAPHIC DISPLAY**
FOR SIMULTANEOUS AUDIO AND VISUAL INFORMATION



455 SECURITY PLACE
ALGOOD TN 38506 USA
TEL +1 931.537.6032
800.824.3190 (US ONLY)
FAX +1 931.537.6089
www.research-electronics.com

TRANSMITTER

Frequency Bands: 880-1005MHz in 200kHz steps. USA: 902.2-927.8MHz
Transmit Power: 14 milliwatts minimum, 1.4 watts peak (effective radiated power)
Power Control: Manual or auto control with 30 dB range. Pulsed operation limits average output to meet USA FCC requirements

RECEIVER

Frequency Bands: Second Harmonic (1760-2010MHz) or Third Harmonic (2640-3015MHz)
Sensitivity: -133dBm for both harmonics
DSP S/W Integration: Programmable between 6 and 18dB gain in sensitivity performance
Receiver Bandwidth: 3kHz

MECHANICAL

Extension Lengths: 16-51 in (40.6-129.5 cm)
Case Dimensions: 6.25 in x 14.9 in x 18.5 in
(15.9 cm x 37.8 cm x 47.0 cm)
Weight with Battery: 3.3 lbs (1.5 kg)
Case Weight: 11.5 lbs (5.2 kg)
Weight with Tool Kit: 23.1 lbs (10.5 kg)

BATTERY

Input AC: 100-240V, 50-60Hz
Run Time: 2.5 hours (SRCH mode)
Charge Time: 1 hour
Batteries: (4 incl.) 7.2V NiMH



TOOL KIT OPTION

- Borescope with built-in light and right-angle viewing for inspection of walls and furniture
- Combination stud finder and metal detector for non-destructive wall evaluation
- RF Wire Tracer and Multi-meter for evaluating miscellaneous wiring
- Rubber-tipped hammer to evaluate the stability of a junction under physical vibration
- Multi-purpose geared screwdriver furnished with small drill bit for use with Borescope

* Miscellaneous Tools: pliers, wire cutters, Leatherman™, inspection mirrors, measuring tape, flashlight, UV light, UV pen, drill bits for walls

RCS-4000 ORION REMOTE CONTROL SOFTWARE OPTION

Allows User to control the ORION from a computer serial port.

- Keeps user at safe distance when using the ORION in hazardous environments
- Provides the ability to "lock" ORION functions and settings
- Can be used for pre-screening of suspicious packages prior to X-Ray
- Available with a heavy-duty tripod and mounting bracket for stabilizing the ORION
- Optional Remote Control Pendant (RCM-4000) also available (does not require computer). Provides power for the ORION through the use of a standard 7.2V ORION Battery or an external DC input from 9-24 volts



Product specifications and descriptions subject to change without notice. © Copyright Research Electronics International 2005.

For more Info & Price Quote, Please Contact:

MDI-Canada

21 Deepglade Cr. Toronto, ON. M2J 1B3, Canada
Email: sales@mdicanada.ca, mdicanada@rogers.com
Website: www.mdicanada.ca